

80 Series Triple Combination


- Individual Lens Replacement
- 19 Years in Production
- IP67 100% Waterproof
- ADR Approved
- 5 Year Warranty
- 12-24 Volt

ADR
Approved


ECE
R10

IP67
Protection

5 Year
Warranty

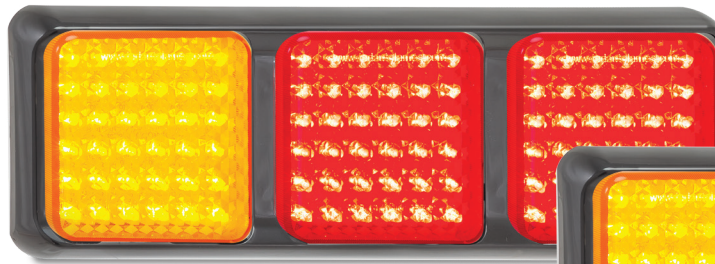

Stop/Tail/Indicator
80BARR - Blister
80BARRM - Blister

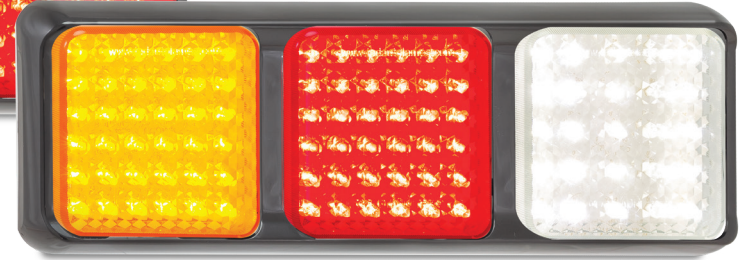


Stop/Tail/Indicator/Reverse
80BARRW - Blister
80BARRWM - Blister

Function	(Stop/Tail) (Indicator)(Reverse)
Size	278mm x 100mm x 28mm
Voltage	12-24 Volt
LED Qty	ARR-108/ARW-97
Cable	40cm cable
Lens	PMMA
Bracket	ABS

Draw	Stop	Tail	Ind	Rev
@13.8V	0.33A	0.06A	0.29A	0.31A
@28V	0.24A	0.07A	0.23A	0.17A

Approvals	Function	Category	CRN
CTA	Stop/Tail/Ind	49/00, 6/00 2a	CTA-060070
CTA	Stop/Tail/Ind/Rev	49/00, 6/00 2a, 1/00	CTA-060070



Fitting Instructions

Horizontally surface mount bracket, run wires through back and clip lens into place. Please refer to ADR 13/00 for mounting instructions.
Wire Colours: Red - Stop, Brown - Tail, Black - Reverse, White - Earth



All enquiries P: 1800 815 000 E: led@ledautolamps.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

All LED Autolamps (AUST) designs are registered throughout the world. - Current as of 04/10/2022